NOTES:

1. Parking and stopping should be prohibited along the work area and tapers.
2. Minimum lane widths shall be 10 feet of driveable surface. When temporary lane widths are less than existing lane widths a LANES NARROW sign or a Narrow Lane (width shown) sign with advisory plaque placed directly below or on the lower side of the warning sign nearest traffic should be used.
3. The Double Reverse Curve, Reverse Curve, and/or Keep Right signs may be omitted when the posted speed limit is 40 mph or less.
4. If tangent length of activity area is 600 feet or less, use the Double Reverse Curve sign.

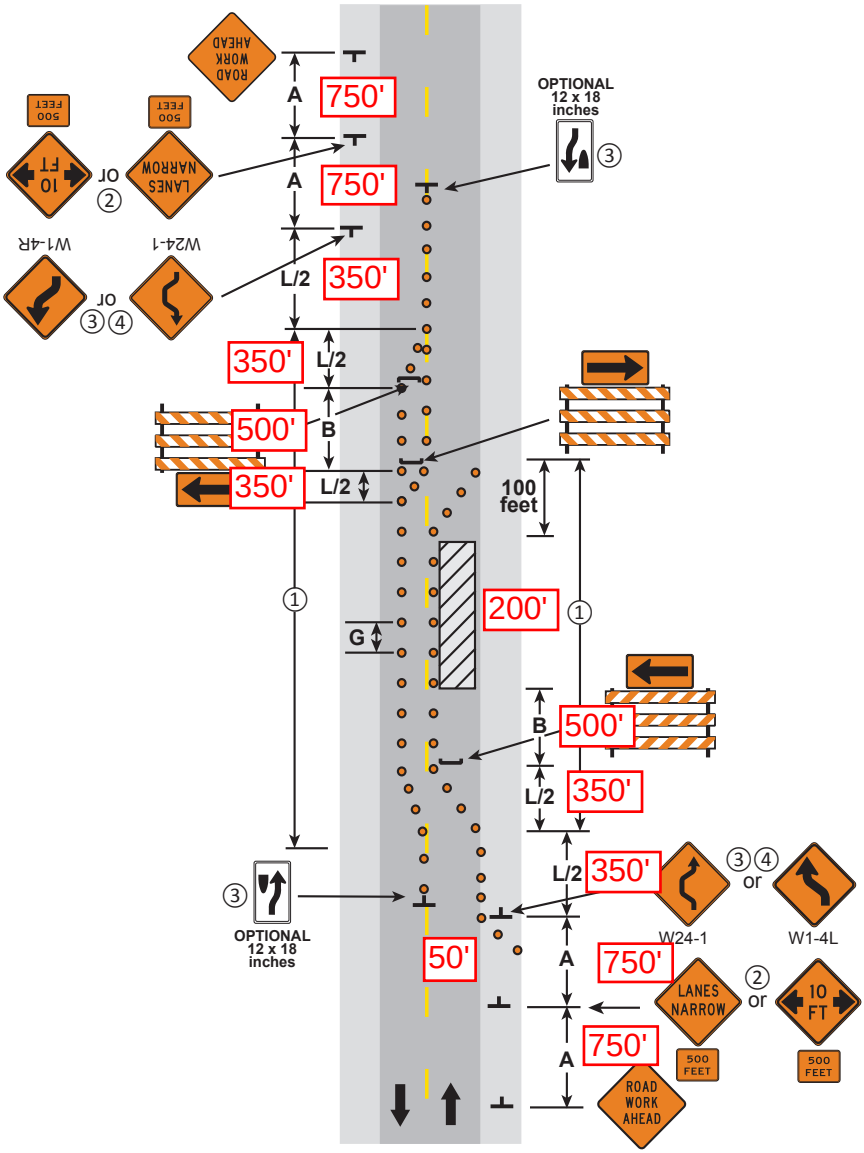

WORK SPACE OCCUPIES ONE HALF OF ROAD

TWO-LANE, TWO-WAY ROAD

3 DAYS or LESS **LAYOUT 29**